




EPH 0012 A Extension Housing for 12 Modules, Frame Installation



System Overview

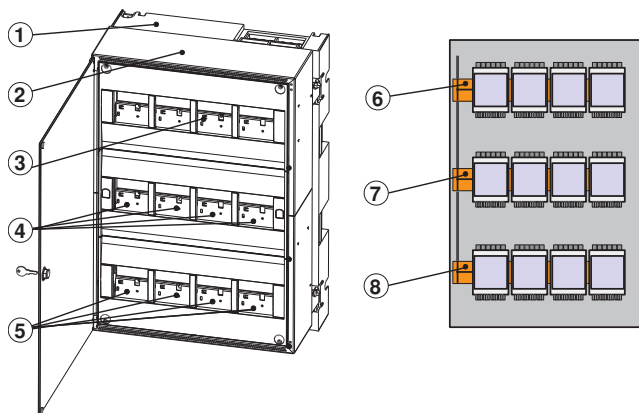

Pos.	Description
1	Mounting Frame
2	Housing
3	Modules 1-4
4	Modules 5-8
5	Modules 9-12
6	Panel Rail for modules 1-4
7	Panel Rail for modules 5-8
8	Panel Rail for modules 9-12

The transparent front door is optional.

Installation/Configuration Notes

- The following are required for the EPH 0012 A Extension Housing, Frame Installation:
 - An FBH 0000 A Mounting Frame Large or alternatively
 - An FRB 0019 A Rack Installation Kit for installation in a 482.6 mm (19") rack.
- Can be equipped with:
 - 3 PRD 0004 A Panel Rails Long, each for 4 modules
- Can be extended with:
 - FDT 0000 A Front Door Transparent, lock right side
 - FDT 0003 A Front Door Transparent, lock left side

Parts Included

Pos.	Description
1	Housing
1	CAN bus connection cable, cable length 190 cm

Ordering Information

EPH 0012 A Extension Housing for 12 Modules, Frame Installation
for surface-mounting or installation in 482.6 mm (19") racks

EPH 0012 A

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by